

REPUBLIC OF KENYA



**MINISTRY OF TRANSPORT, INFRASTRUCTURE, PUBLIC
WORKS, HOUSING AND URBAN DEVELOPMENT**

STATE DEPARTMENT OF PUBLIC WORKS

BILLS OF QUANTITIES

FOR

**PROPOSED PAINT WORKS AT KAGIRA PRIMARY SCHOOL IN DAGORETTI
SOUTH - NAIROBI.**

TENDER NO.: DS-NGCDF-KPS-2020/2021

ISSUED BY:


**REGIONAL WORKS OFFICER
NAIROBI REGION
P.O. BOX 42267
NAIROBI**

PREPARED BY:

**REGION ARCHITECT
NAIROBI REGION
P.O. BOX 42267
NAIROBI**

**REGION QUANTITY SURVEYOR
NAIROBI REGION
P.O. BOX 42267
NAIROBI**

OCTOBER, 2021

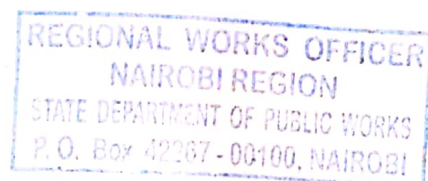

PROPOSED PAINT WORKS AT KAGIRA PRIMARY SCHOOL IN DAGORETTI SOUTH - NAIROBI

ITEM	DESCRIPTION	QTY	UNIT	RATE	K.SHS
	<p><u>DEMOLITIONS AND ALTERATIONS</u> (All Provisional)</p> <p><u>The items of demolitions and removal shall include shoring, making good disturbed areas to match existing and loading and carting away debris unless otherwise specified</u></p>				
A	Carefully rub down the existing wall paint and prepare surface to receive new paint; and cart away arisings as directed.(Approximately 650 Square Metres)		Item		130,000.00
	<p><u>INTERNAL WALL FINISHES</u></p> <p><u>Painting and decorations</u></p> <p><u>Prepare and apply three coats of first quality plastic emulsion paint or any other equal and approved paint to: -</u></p>				
A	Plastered walls: internal	650	sm	400	260,000.00
Total for Measured Works Carried to Collection					390,000.00

PROPOSED PAINT WORKS AT KAGIRA PRIMARY SCHOOL IN DAGORETTI SOUTH - NAIROBI

ITEM	DESCRIPTION	QTY	UNIT	RATE	K.SHS
<u>EXTERNAL WALL FINISHES</u>					
A	Carefully rub down the existing external wall paint finish and prepare surface to receive new paint; and cart away arisings as directed.(Approximately 700 Square Metres)		Item		140,000.00
<u>Painting and decorations</u>					
<u>Prepare and apply three coats of first quality plastic emulsion paint or any other equal and approved paint to: -</u>					
B	Plastered walls: internal	700	sm	380	266,000.00
Sub total					406,000.00
From Page 1					390,000.00
Total for Paint works					796,000.00
<u>GRAND SUMMARY</u>					
1	Preliminaries				24,000.00
2	Builder's Works				796,000.00
<u>PROVISIONAL SUMS</u>					
3	Contingency Sums				30,000.00
TOTAL FOR PAINT WORKS CARRIED TO GRAND SUMMARY					850,000.00

MW/2

REGIONAL WORKS OFFICER
 NAIROBI REGION
 STATE DEPARTMENT OF PUBLIC WORKS
 P.O. Box #2267-00100, NAIROBI