

REPUBLIC OF KENYA



COUNTY GOVERNMENT OF MIGORI
MINISTRY OF PUBLIC WORKS ,ROADS AND TRANSPORT

Fax No.....
Tel.....
Email.....
When replying please quote
Our Ref NO: MOPW/RNG/R/DING/CDF IV/DI
Your Ref.....

SUBCOUNTY WORKS OFFICE,
RONGO SUBCOUNTY
P.O BOX 43, 40404
RONGO

Date 18/03/2020


THE FUND ACCOUNT MANAGER,
RONGO CONSTITUENCY,
P.O BOX 542,40404
RONGO.

Dear Sir/Madam

**RE: VARIATION OF WORKS ON CONSTRUCTION OF 2 NO CLASSROOM
BLOCK AT MIYARE SEC SCHOOL.**

The above project was executed but as the works were going on it was realized that certain items were missing in the bills of quantities or was very minimal i.e

1. The soil type was realized to be weak (**black cotton soil**) and required reinforcement with underground beam to ensure the slab is stable, leading increased quantity of hardcore, murram, concrete, formwork and lab our

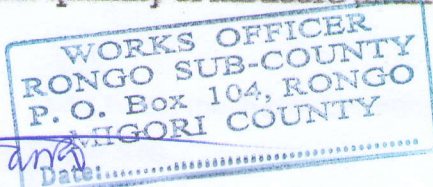

ROSE A. ODONGO
SUB COUNTY WORKS OFFICER

S/NO	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
A	<u>FLOATING BEAM UNDERGROUND BEAM</u>				
	Reinforced concrete class 20/20 as described in underground ring beam	CM	6	12,000	72000
	Swan formwork to side and soffits of ring beam	SM	52	350	18200
	Reinforcement				
	12mm diameter sq. twisted high tensile bars to Bs.4461 including cutting to size , binding	Kg	306	140	42840
	8mm diameter mild steel round bars to Bs. 449 ditto	Kg	100	140	14000
	Binding wire	Roll	1	4000	4000
	<u>FILLINGS</u>				
	300mm thick hardcore fill, compacted in layers of 100mm to make up level under floor slab	CM	70	800	56,000
	50mm thick wall selected murrum blinding on hardcore	SM	30	200	6000
	<u>BRC</u>				
	BRC fabric mesh reinforcement to BS A 142 in floor slab.	SM	200	250	50,000
Measured works				263,040	

Allow 5% for project management committe				<u>13,152</u>
TOTALS				276,192
Add 14% VAT				<u>38,666.88</u>
TOTAL VARIATION FOR 2 NO. CLASSROOM AT MIYARE MIXED DAY SEC SCHOOL				<u>314,858.88</u>

WORKS OFFICER
RONGO SUB-COUNTY
P. O. Box 104, RONGO
~~WICORA COUNTY~~
Date: _____