



ITEM	DESCRIPTION	QNTY	UNIT	RATE	AMOUNT
	ELEMENT NO. 03 Doors, windows				
	1.0 Windows				
	<u>Supply and fix the following mild steel casement windows, comprising of 40mmx25mmx 2mm thick steel tube framing, 25mmx25mmx2mm thick steel tubes, intermediate members, 25mmx2mm thick flat bars, complete with inbuilt permanent vents, including all accessories, as fasteners, and stays, including anti-rust paint to approval:</u>				-
A	Window overall size 1500mm wide x 1200mm high fixed to detail	6	NO	10,500	63,000.00
B	Ditto but size 1200mm x1200mm high	4	NO.	10,500	42,000.00
	Glazing				-
C	4mm thick clear sheet glass fixed to metal in panes with putty.	20	SM	850	17,000.00
	Painting				-
	<u>Prepare and apply three coats of gloss paint or other equal and approved to:-</u>				-
D	General surfaces of windows	40	SM	250	10,000.00
	Doors				-
	Mild steel Door				-
E	45mm thick mild steel door size 900 x 2400mm high comprising 30x30x2mm RHS framework infilled with 3mm thick metal plate complete with 50mm x 50mm mild steel angled section frame complete with steel hinges, fixing accessories and locks.	2	NO	12,000	24,000.00
	Painting				-
	<u>Prepare and apply three coats of gloss paint or other equal and approved to:-</u>				-
F	General surfaces of Doors	10	SM	250	2,500.00
	Total for Windows and Doors Carried to Summary				158,500.00



ITEM	DESCRIPTION	QNTY	UNIT	RATE	AMOUNT
	<u>ELEMENT NO.4 FINISHES</u>				
	<u>Floor finishes.</u>				
	<u>Cement and sand Backing.</u>				-
					-
A	32mm thick c/s backing to floor finished hard and smooth with cloured screed with steel float.	157	SM	300	47,100.00
					-
	<u>Ceramic tiles as 'SAJ CERAMIC' or other equal and approved bedded and jointed in cement and sand (1:3) mortar and flush pointed with white cement</u>				-
					-
B	300×300×8mm tiles	157	SM	1,400	219,800.00
					-
	<u>Wall finishes.</u>				-
					-
	<u>External and Internal</u>				-
B	15mm thick cement and sand plaster to walls both internally and externally to receive paint.	222	SM	250	55,500.00
					-
C	Ditto on blackboard surfaces	18	SM	200	3,600.00
					-
	<u>Painting</u>				-
					-
	<u>Prepare and apply three Plastic Silk Emulsion paint to:</u>				-
					-
D	Walls Extenally and Internally	222	SM	250	55,500.00
					-
E	Blackboard	18	SM	200	3,600.00
					-
	<i>Total for Finishes carried to summary</i>				385,100.00

ITEM	DESCRIPTION	QNTY	UNIT	RATE	AMOUNT
<u>SUMMARY.</u>					
1	ELEMENT NO. 01,- Demolitions,walling and ringbeam				356,800.00
2	ELEMENT NO. 02,- Re-roofing				357,500.00
3	ELEMENT NO. 03,- Doors and Windows				158,500.00
4	ELEMENT NO. 03,-Finishes				385,100.00
Sub-Total -01					1,257,900.00
1	PMC Allowances				20,000.00
2	Project management and supervision expenses				30,000.00
3	Tender evaluation and opening				25,000.00
4	Branding and signpost				20,000.00
GRAND TOTAL					1,352,900.00

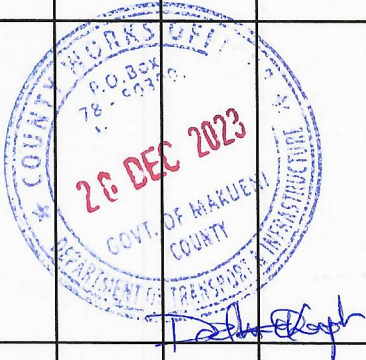

Amount in Words Kenya Shillings

.....

Name of Tenderer

.....

Address

.....

Date.....

Name of Witness

.....

Address

.....

Signature

